High-Frequency Light Tower

KLT-6500





Compact and supersilent metal halide light tower

LIGHT BOY

KLT -6500

400W Metal Halide Lamp x 4 3 Stages Mast <4.2m(13ft)height>

FEATURES Compact!

1. Easy to transport -

Multiple units can be transported on a single truck.

2. Easy to handle -

One person can easily manoeuvre the units at the site.

3. Less storage space required.

Economical!

1. High-Frequency Air-cooled Diese/Gen-set —

Tough, durable and yet lower rurning cost.

2. Metal Halide Lamps -

Bulbs have extended working ife with lower energy comsumption, and still provide nes more luminou intensity .compared to halogen lights.

3. High-Frequency Lamps —

Complete elimination of flicker.

Quiet!

LWA: 90dB (A)

Can operate in residential areas


Safety Emergency ock device mergency lock fitted as standard on mast winch

To see or order KLT-6500 light tower,call 86.0591.22071372 or visit worldbrighter.com

SPECIFICATIONS

HIGH-FREQUENCY LIGHTING TOWER		
	Voltage	130V
	Ampere	13.2A
	Lamp	
	Type	Metal Halide Lamp
	Watt x Number	400W x 4
	Total luminous flux	160,000lm
	Outside temperature	minus 5°C (23°F) to plus 40°C (104°F)
	Mast	
	Number of stage	3
The second	Туре	Manual winch //
	Dimension(L x W x H)	
	Working	1600 x 1550 x 2100 to 4200mm
		(5'3" x 5'1"x 6'11" to 13'10")
	Storage	1040 x 920 x 1700mm
		(3'5" x 3' x 5'7")
	Weight	116kg (256lbs.)
GENERATOR (A)		
I	Model	YDG25HVS-EXB
	Frequency	540 @ 3600min ⁻¹
	Phase	Single phase
	Output	1.7kVA
	Starting system	Electric
	Fuel oil/Tank capacity	Diesel Fuel / 15L (4.0gal.)
	LO alarm	Automatic stopping if oil runs out
	Dry weight	137kg (302lbs.)
Continuous operation 18Hrs		18Hrs
w/o resupplying fuel		

DIMENSIONS < mm (ft.in.) >

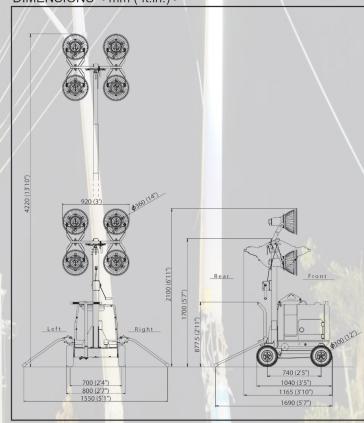



86-05<mark>91-</mark>22071372 86-05<mark>91-</mark>22071372 fax www.worldbrighter.com